




# EGT-STL-2000-STX Entraguard Steel™

DATA SHEET

## Standard Features for Telephone Entry / Access Control System

- Four line, large font, soft white, supertwist LCD display with double Lexan™ cover
- Three 80 character, programmable, scrolling pages for instructions and messages with automatic timed rotation
- 2,000 tenant capacity with 3,600 telephone entry transaction buffer
- 50,000 cardholder capacity with 10,000 card access transaction buffer
- Up to 6-digit directory code, up to 5-digit Entraguard ID codes (PINs), up to 15-digit telephone numbers
- Networkable to manage multiple doors via RS-485
- Time Zone restrictions for calling tenants and for PIN usage
- Links a visitor to the resident who allowed entry
- Programmable talk time, tone dialing, adjustable volume control
- Quick disconnect terminals
- One Mylar™ speaker with superior sound
- Heavy duty door and alarm relays, door forced open and door held open alarms
- Non volatile memory, built-in surge protection, plus surge protection kit
- Extremely weather and vandal resistant housing
- Surface or Recess mounting

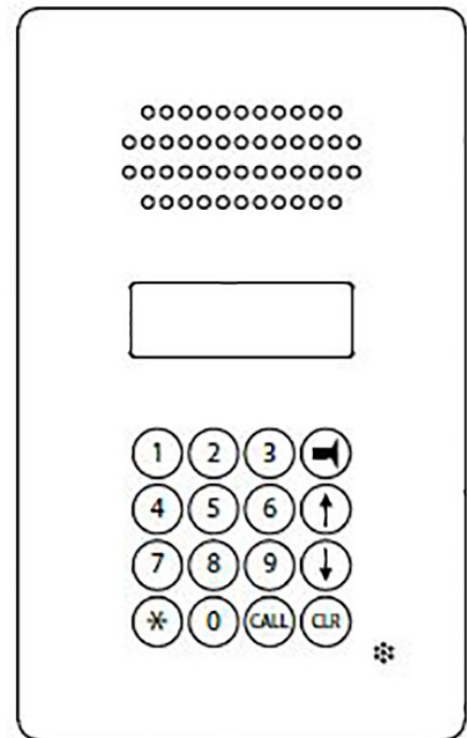

EGT-STL-2000-STX

The **Entraguard Steel** is a Telephone Entry system with integrated Card Access Control. This is a two-piece unit with a highly vandal resistant 10 gauge front cover protecting the telephone entry module. The card access module is contained in a separate locking metal enclosure designed to be located in an electrical or IT room. The telephone Entry module is designed to easily retrofit into existing back boxes that house antiquated Sentex telephone Entry modules. The modular design allows for extremely quick field replacement of the electronics along with the inner enclosure. It is designed with an attractive, brushed stainless steel construction, but is able to withstand the most extreme vandal prone environments.

The Entraguard Steel has direct support for three fully supervised card readers, requiring no additional hardware, and can network with other Entraguard Steel units as well as additional NXT Card Access controllers for larger systems. Each Entraguard Steel also has two extra relay outputs that can be used in a variety of ways including turning on a lobby light, unlocking an interior door, or providing access to two separate entrances by using tone commands from the tenant's location or based on an access granted decision. The Entraguard Steel has a four-line, scrolling display and a tenant capacity of 2,000; enough to handle virtually any size installation.



[www.kerisys.com](http://www.kerisys.com)

302 Enzo Drive • San Jose, California 95138 • email: [sales@kerisys.com](mailto:sales@kerisys.com)

Phone: 408-435-8400 • Toll Free: 800-260-5265 • Fax: 408-577-1792

# EGT-STL-2000-STX Entraguard Steel™

## DATA SHEET - Page 2 of 2

This unique merging of Telephone Entry and Card Access Control combines the best of both worlds into one package. Features generally found only in Card Access systems are now available for Telephone Entry customers.

The unit provides seamless system integration with Keri's fully supervised, vandal resistant readers, directly supporting either two or four readers. Inputs and Outputs can be assigned to ancillary tasks.

This unit supports 32 time zones, 3 holiday schedules, and an unlimited number of access control groups. Time Zones can be applied to Entraguard IDs (PINs) and Access Control cards, as well as doors and gates. Expiration dates can be assigned to Entraguard IDs (PINs) and Access Control cards.

Direct, manual door operation can be done by an operator from the host software, and automatic lock/unlock schedules can be created for doors and gates. The system provides remote online management of multiple sites and the ability to update multiple Access Control and Telephone Entry units at one time.

There is full or filtered reporting of events, and features such as Rollcall/Track (allows you to identify if someone is in or out of a building) and Muster (providing a check-in point in the case of an emergency).

Image capture allows the software to display cardholder photos upon presentation and the optional badging feature allows you to print those photos on the badges for positive identification.

The system also includes Telephone Entry privacy features such as Do Not Disturb (allowing tenants to set "no call" times) and Do Not Display Name (protecting tenant privacy at the Entraguard unit), both programmable on a per tenant basis; as well as the ability to link visitors to the residents who allowed them entry.

### General Specifications\*:


- Capacity: Up to 2,000 Tenants
- Door Support: Up to 3 with supervised readers
- Outputs: Door Relay, Alarm Relay, 2 additional programmable relays
- Operating Temperature: +5° to 140° F (-15° to 60° C)  
With Heater: -20° to 140° F (-29° to 60° C)
- Input Power: 12 VDC
- Current Draw: 1300 mA
- Relay Contact Rating: 1 A @ 24 VDC
- Material: 10 gauge stainless steel
- Warranty: 2 years (materials and workmanship)
- Finish: Brushed Stainless Steel

### Surface-Mount Specifications\*:

- Two mounting options: Lowered, Centered
- Face-Plate Size: 9.75" H x 6.00" W (24.77 cm x 15.24 cm)
- Depth with Lowered Mount: 1.825" (4.64 cm)
- Depth with Centered Mount: 2.20" (5.59 cm)
- Weight: 4 lbs (1.81 kg)

*Specifications subject to change without notice.*

*All trademarks are the property of their respective owners.*

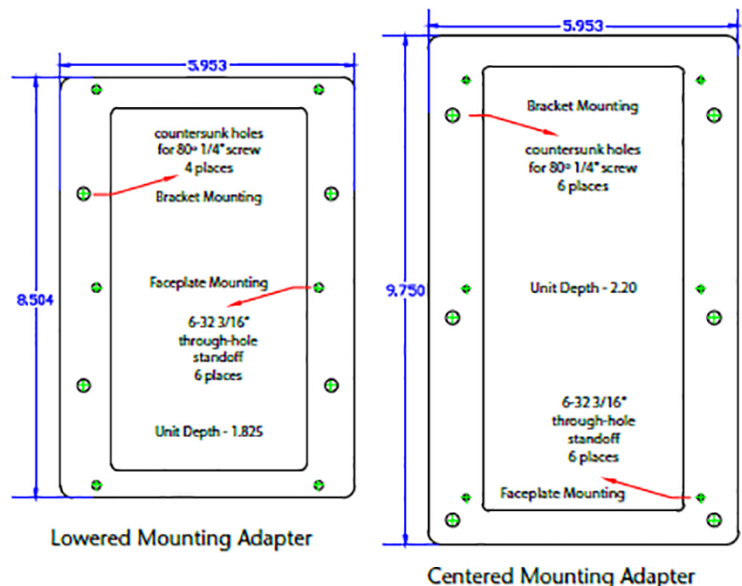

Presented By: