


Doors.NET Ethernet Connection Ports

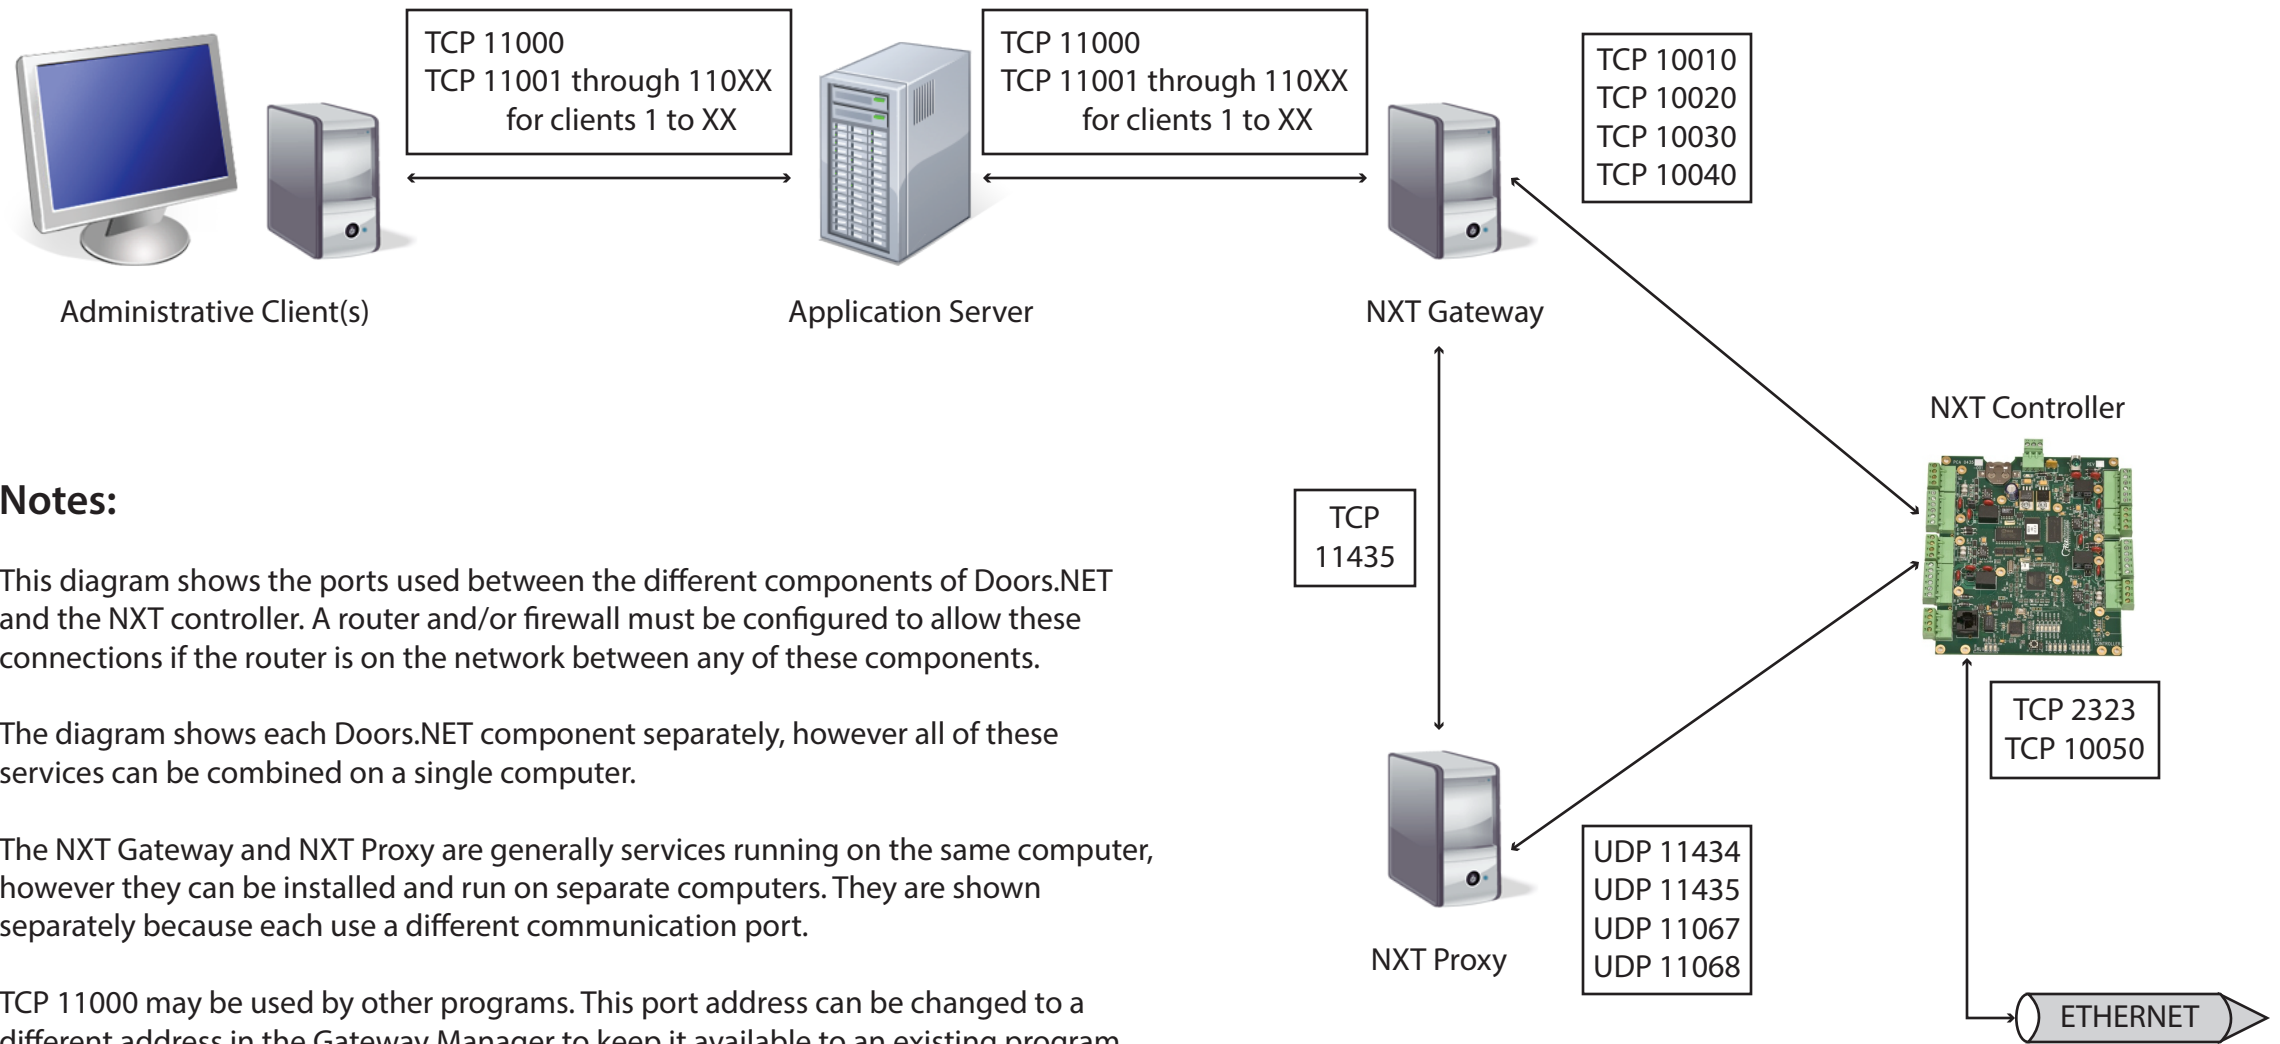

Notes:

This diagram shows the ports used between the different components of Doors.NET and the NXT controller. A router and/or firewall must be configured to allow these connections if the router is on the network between any of these components.

The diagram shows each Doors.NET component separately, however all of these services can be combined on a single computer.

The NXT Gateway and NXT Proxy are generally services running on the same computer, however they can be installed and run on separate computers. They are shown separately because each use a different communication port.

TCP 11000 may be used by other programs. This port address can be changed to a different address in the Gateway Manager to keep it available to an existing program.