

EntraGuard Platinum & Silver Recess Mount

The FMK–95 Recess Mount is intended to provide a secure wall mount for the EntraGuard Platinum or EntraGuard Silver Telephone Entry Controller. Using the recess mount gives an extra level of protection for the EntraGuard unit. There are two knockouts and an open area provided allowing flexibility for location and routing of the cables. Six holes are provided for mounting the recess mount. Four screws, washers, and nuts are also provided for mounting.

1.0 Dimensions

- 14 ³/₈ inches High x 10 ⁵/₈ inches Wide x 2 inches Deep¹
(37 cm High x 27 cm Wide x 5 cm Deep)

2.0 Enclosure Mounting

The easiest method for marking the location of the mounting holes for drilling is to hold the enclosure against the mounting surface and then use a pencil to mark the mounting hole locations against the surface to which the enclosure is to be mounted.

3.0 Cabling Knockouts

Two knockouts are provided for flexibility in routing cables. One is on the bottom of the mount. One is on the back of the mount. An open area is provided at the back of the recess mount box for ease in cabling.

NOTE: Identical knockouts are located on the EntraGuard unit for ease of routing cables. Be sure to use the corresponding knockouts on both the unit and the mount.

4.0 Controller Mounting

Once the locations of the mounting holes have been drilled, place the controller in the recess mount (ensuring all mounting and cabling holes align properly) and firmly insert the four screws through the controller and recess mount into the previously drilled mounting holes.

NOTE: There are an additional four mounting holes located on each side of the recess mount for help in mounting the recess mount if necessary.

1. The dimensions given are for the recess mount box. This is the size to which the wall should be cut to allow the recess mount box to fit correctly.



EntraGuard Platinum & Silver Recess Mount

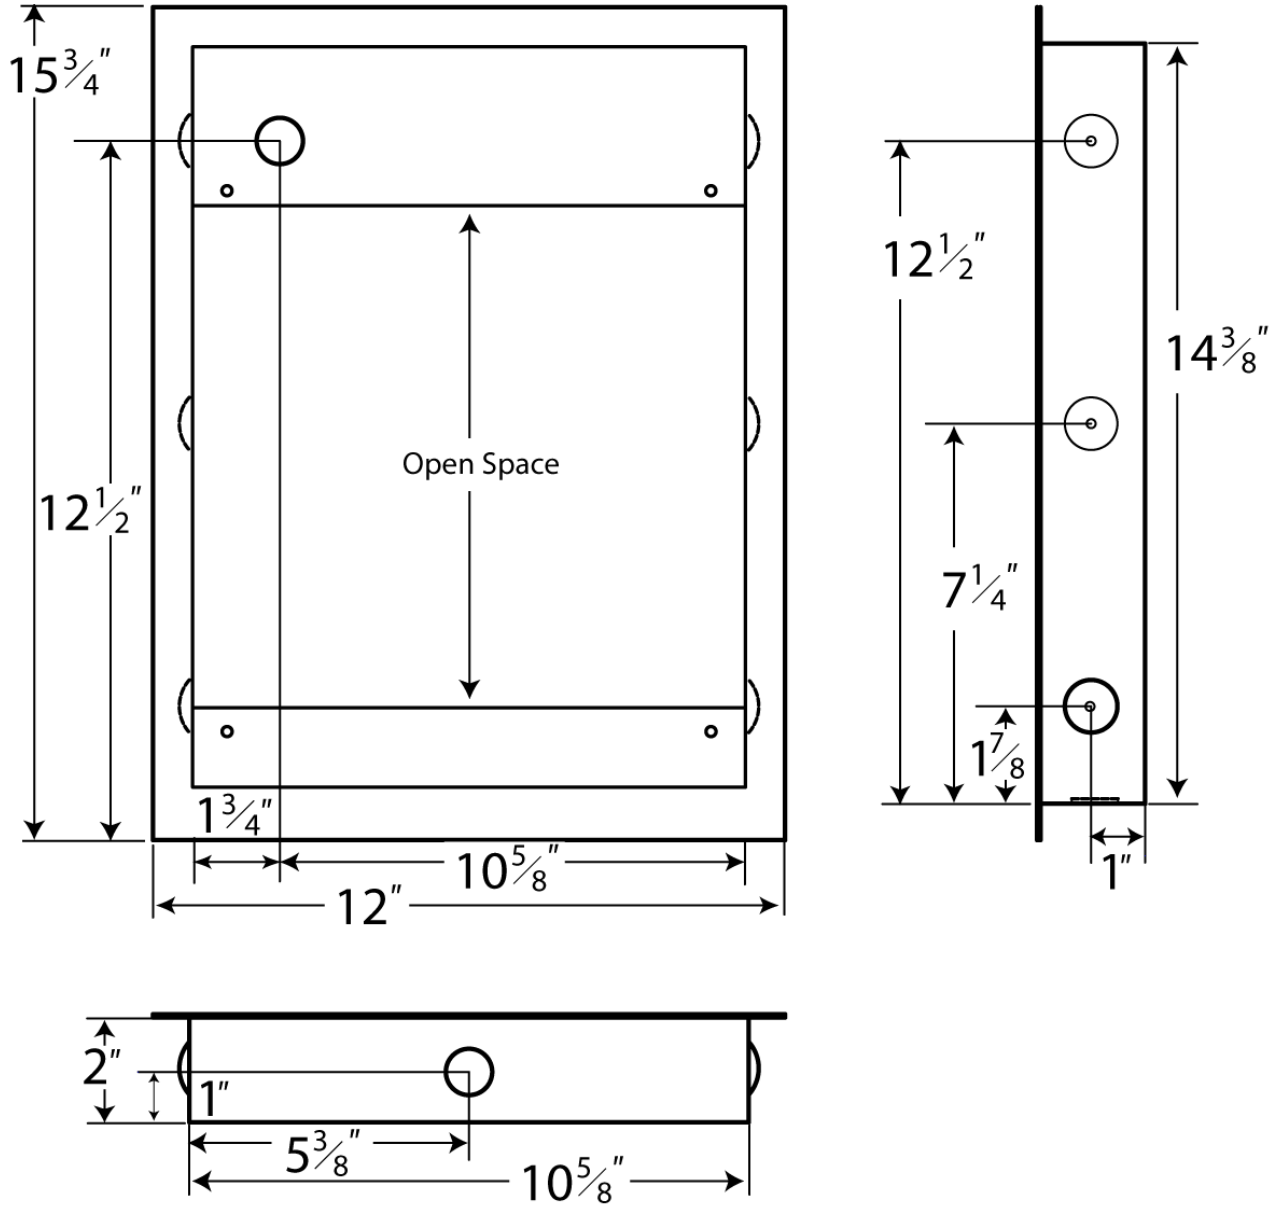


Figure 1: FMK-95 Recess Mount Dimensions